


Note: Use Image below to assist with removal/installation.

Removal

- Remove Security Bolt.
- Insert long rod into threaded hole on front of Hitch Bar. Lightly tap on long rod to remove Bullet and Plug.

Installation

- Install new Bullet into back of Hitch Bar. Round end of Bullet toward back.
- Install Plug into back of Hitch Bar. Plug to finish flush with end of hitch bar.
- Thread Security Bolt into front of Hitch Bar.
- Ensure Expander Ball is seated into Ball Pocket. If ball pocket does not retain ball, pocket will need to be repeened.

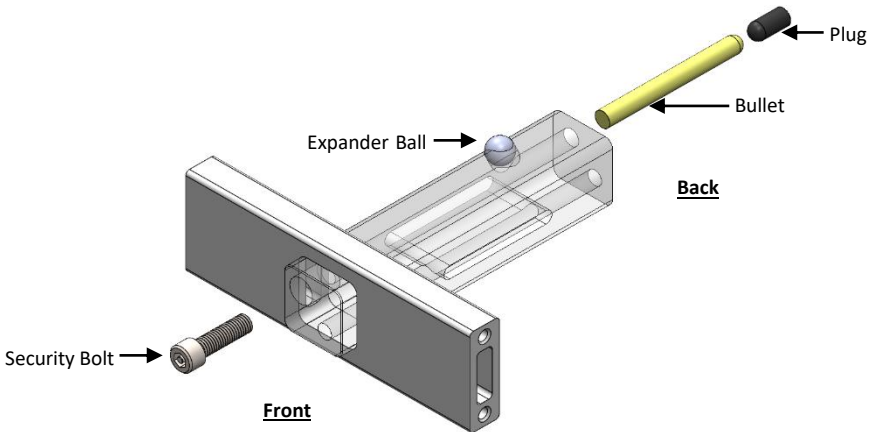

Additional Instructions

- Remove road debris off nuts and bolts to prevent corrosion.
- Inspect hardware on Rack periodically to ensure proper working conditions.
- Certain car wash chemicals may damage Rack finish. Please use caution when cleaning vehicle and/ or Rack.

Questions or comments? Contact our support team via email at email@1up-usa.com